

FORA

LIGHTING



RAISE AND SHINE

LED UFO HIGHBAY 100W / 120W / 150W / 200W / 240W / 300W
INDOOR

IP66



CE



QUICKSHIP



DURABILITY AND **AFFORDABILITY**

Raise the quality, performance, and savings of your lighting with our competitively-priced UFO high bay. This light-weight but extremely durable fixture shines in a wide variety of environments for multiple industries, delivering crisp and clear performance under even the harshest conditions. Backed with a 7-year warranty, our UFO high bay is the go-to solution for commercial and industrial environments.

SPECIFICATIONS

- Rated IP66
- DLC 4.0 Premium
- 480V available
- Ideal for bovine, swine and poultry farms; food processing

ENERGY-SAVING FEATURES

- Up to 150 Lumens / watt
- Industry-leading lm/w ratio.
- 50,000 hour LED life.
- Uses 20% less energy than metal halides.
- Airflow design ensures fixtures run 30% cooler than most other high bays.
- Integrated 0-10V diming.
- Motion sensor activators available for additional energy savings.

QUICK AND EASY INSTALLATION

- Quick installation saves time and money.
- Compatible with pre-existing HID mounting
- Loop or adjustable mount installation.

TOUGH AND INNOVATIVE

- Unique and innovative design
- Rugged die-cast aluminum
- Airflow design enables fixture to run 30% cooler than most high bays
- Polycarbonate lens cover
- Clear or frosted cover available

60W - 240W



100W - 240W




300W



LED HIGH BAY REPLACES COMMON ALTERNATIVES


HIGH BAY WATTS	HIGH BAY LUMENS	LUMENS /WATT	REPLACE METAL HALIDE	REPLACE FLUORESCENT	MOUNTING HEIGHT
100	14,000	140	250W	4 LAMP T5 and 6 LAMP T8	16' to 24'
150	22,000	147	400W	6 LAMP T5 HO and 8 LAMP T8	20' to 24'
200	27,000	135	750W	8 LAMP T5 HO	24' to 40'

5% variation on published numbers

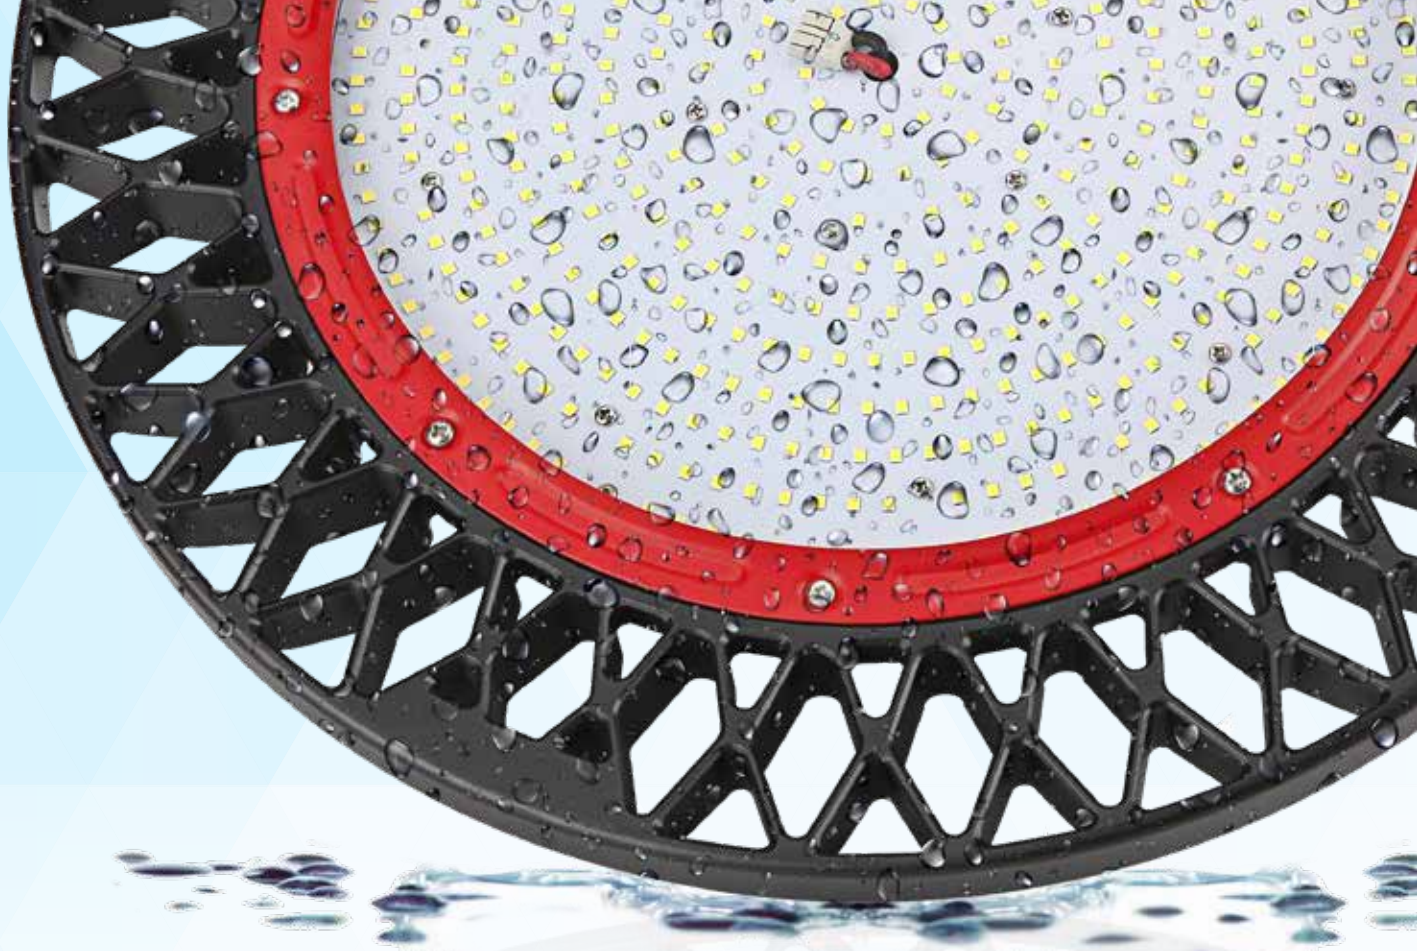

IP66 RATED

- Resistant to rain, sun and snow.
- Protected against condensation and dust
- Protected against water projected from a nozzle.



UP TO 150 LUMENS PER WATT

Our super bright DLC 4.0 LEDs light up environments while using less energy than most high bays.



INNOVATIVE DESIGN

Our innovative design is lightweight and extremely strong. The extra heat sync metal surface area and special dispersive design allows the fixture to run 30% cooler than most high bays; which substantially increases the lifespan. Backed by a 7 year warranty.



► Our UFO high-bay's external heat sink is lightweight and strong, allowing the fixture to run 30% cooler than competitive products, substantially increasing the lifespan and saving you money.

BLACK EXTERIOR / 120-277V / CLEAR

USA Model Number	DLC V4.0	Wattage	Input Voltage	Color Temp	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
		(Watts)	(Volts)	(Kelvin)						
FHB1-100-50K-UNV-C-B	Premium	100W	100-277	5000K	14000	140	Clear	>75	13.8"x7.9"	9.3
FHB1-150-50K-UNV-C-B	Premium	150W	100-277	5000K	22000	146	Clear	>75	13.8"x7.9"	11.5
FHB1-200-50K-UNV-C-B	Premium	200W	100-277	5000K	27000	135	Clear	>75	16.5"x7.9"	14.6
FHB1-240-50K-UNV-C-B	Premium	240W	100-277	5000K	31000	129	Clear	>75	16.5"x7.9"	14.6
F68103-G2HB-300-277-50K	Premium	300W	100-277	5000K	39000	130	Clear	>75	12.6"x12.6"x6"	16.5

BLACK EXTERIOR / 480V / CLEAR

USA Model Number	DLC V4.0	Wattage	Input Voltage	Color Temp	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
		(Watts)	(Volts)	(Kelvin)						
FHB1-100-50K-480-C-B	Premium	100W	480	5000K	14000	140	Clear	>75	13.8"x7.9"	9.3
FHB1-150-50K-480-C-B	Premium	150W	480	5000K	22000	146	Clear	>75	13.8"x7.9"	11.5
FHB1-200-50K-480-C-B	Premium	200W	480	5000K	27000	135	Clear	>75	16.5"x7.9"	14.6
FHB1-240-50K-480-C-B	Premium	240W	480	5000K	31000	129	Clear	>75	16.5"x7.9"	14.6
F68103-G2HB-300-480-50K	Premium	300W	480	5000K	39000	130	Clear	>75	12.6"x12.6"x6"	16.5

BLACK EXTERIOR / 120-277V / FROSTED

USA Model Number	DLC V4.0	Wattage	Input Voltage	Color Temp	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
		(Watts)	(Volts)	(Kelvin)						
FHB1-100-50K-UNV-F-B	Premium	100W	100-277	5000K	13020	130	Frosted	>75	13.8"x7.9"	9.3
FHB1-150-50K-UNV-F-B	Premium	150W	100-277	5000K	20460	136	Frosted	>75	13.8"x7.9"	11.5
FHB1-200-50K-UNV-F-B	Premium	200W	100-277	5000K	25110	126	Frosted	>75	16.5"x7.9"	14.6
FHB1-240-50K-UNV-F-B	Premium	240W	100-277	5000K	28830	120	Frosted	>75	16.5"x7.9"	14.6

BLACK EXTERIOR / 480V / FROSTED

USA Model Number	DLC V4.0	Wattage	Input Voltage	Color Temp	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
		(Watts)	(Volts)	(Kelvin)						
FHB1-100-50K-480-F-B	Premium	100W	480	5000K	13020	130	Frosted	>75	13.8"x7.9"	9.3
FHB1-150-50K-480-F-B	Premium	150W	480	5000K	20460	136	Frosted	>75	13.8"x7.9"	11.5
FHB1-200-50K-480-F-B	Premium	200W	480	5000K	25110	126	Frosted	>75	16.5"x7.9"	14.6
FHB1-240-50K-480-F-B	Premium	240W	480	5000K	28830	120	Frosted	>75	16.5"x7.9"	14.6

Each Model: PF >.90 Operating Temp -4 0~50°C Beam Angle 130° Optics Wide Beam



WHITE EXTERIOR / 120-277V / CLEAR

Model Number	DLC V4.0	Wattage (Watts)	Input Voltage (Volts)	Color Temp			Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
				(Kelvin)	Lumens	LPW				
FHB1-60-50K-UNV-C-W	Premium	60W	100-277	5000K	9000	150	Clear	>75	11.8"x7"	5.2
FHB1-80-50K-UNV-C-W	Premium	80W	100-277	5000K	12000	150	Clear	>75	11.8"x7"	5.2
FHB1-100-50K-UNV-C-W	Premium	100W	100-277	5000K	15000	150	Clear	>75	11.8"x7"	5.2
FHB1-120-50K-UNV-C-W	Premium	120W	100-277	5000K	18000	150	Clear	>75	11.8"x7"	5.2
FHB1-150-50K-UNV-C-W	Premium	150W	100-277	5000K	22500	150	Clear	>75	13"x7.9"	7.7
FHB1-200-50K-UNV-C-W	Premium	200W	100-277	5000K	30000	150	Clear	>75	13"x7.9"	9
FHB1-250-50K-UNV-C-W	Premium	250W	100-277	5000K	36000	144	Clear	>75	13"x7.9"	9

WHITE EXTERIOR / 480V / CLEAR

Model Number	DLC V4.0	Wattage (Watts)	Input Voltage (Volts)	Color Temp			Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
				(Kelvin)	Lumens	LPW				
FHB1-60-50K-480-C-W	Premium	60W	480	5000K	9000	150	Clear	>75	11.8"x7"	5.2
FHB1-80-50K-480-C-W	Premium	80W	480	5000K	12000	150	Clear	>75	11.8"x7"	5.2
FHB1-100-50K-480-C-W	Premium	100W	480	5000K	15000	150	Clear	>75	11.8"x7"	5.2
FHB1-120-50K-480-C-W	Premium	120W	480	5000K	18000	150	Clear	>75	11.8"x7"	5.2
FHB1-150-50K-480-C-W	Premium	150W	480	5000K	22500	150	Clear	>75	13"x7.9"	7.7
FHB1-200-50K-480-C-W	Premium	200W	480	5000K	30000	150	Clear	>75	13"x7.9"	9
FHB1-250-50K-480-C-W	Premium	250W	480	5000K	36000	144	Clear	>75	13"x7.9"	9

Each Model: PF >.95 Operating Temp -4 0~50°C Beam Angle 130° Optics Wide Beam



WHITE EXTERIOR / 120-277V / FROSTED

US Model Number	DLC V4.0	Wattage (Watts)	Input Voltage (Volts)	Color Temp (Kelvin)	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
FHB1-60-50K-UNV-F-W	Premium	60W	100-277	5000K	8370	140	Frosted	>75	11.8"x7"	5.2
FHB1-80-50K-UNV-F-W	Premium	80W	100-277	5000K	11160	140	Frosted	>75	11.8"x7"	5.2
FHB1-100-50K-UNV-F-W	Premium	100W	100-277	5000K	13950	140	Frosted	>75	11.8"x7"	5.2
FHB1-120-50K-UNV-F-W	Premium	120W	100-277	5000K	16740	140	Frosted	>75	11.8"x7"	5.2
FHB1-150-50K-UNV-F-W	Premium	150W	100-277	5000K	20925	140	Frosted	>75	13"x7.9"	7.7
FHB1-200-50K-UNV-F-W	Premium	200W	100-277	5000K	27900	140	Frosted	>75	13"x7.9"	9
FHB1-250-50K-UNV-F-W	Premium	250W	100-277	5000K	33480	134	Frosted	>75	13"x7.9"	9

WHITE EXTERIOR / 480V / FROSTED

Model Number	DLC V4.0	Wattage (Watts)	Input Voltage (Volts)	Color Temp (Kelvin)	Lumens	LPW	Optics	CRI	Dimensions (W" x H")	Weight (lbs.)
FHB1-60-50K-480-F-W	Premium	60W	480	5000K	8370	140	Frosted	>75	11.8"x7"	5.2
FHB1-80-50K-480-F-W	Premium	80W	480	5000K	11160	140	Frosted	>75	11.8"x7"	5.2
FHB1-100-50K-480-F-W	Premium	100W	480	5000K	13950	140	Frosted	>75	11.8"x7"	5.2
FHB1-120-50K-480-F-W	Premium	120W	480	5000K	16740	140	Frosted	>75	11.8"x7"	5.2
FHB1-150-50K-480-F-W	Premium	150W	480	5000K	20925	140	Frosted	>75	13"x7.9"	7.7
FHB1-200-50K-480-F-W	Premium	200W	480	5000K	27900	140	Frosted	>75	13"x7.9"	9
FHB1-250-50K-480-F-W	Premium	250W	480	5000K	33480	134	Frosted	>75	13"x7.9"	9

Each Model: PF >.95 Operating Temp -4 0~50°C Beam Angle 130° Optics Wide Beam

Talk to your distributor or contact us at
orders@foralighting.com | 1 (844) 865-5444
 1951 S. Parco Ave., Unit A | Ontario, CA 91761

**▶ STOCKED AND READY TO
 QUICK SHIP NEXT DAY!**



**OUTSTANDING
PERFORMANCE.**

**OUTSTANDING
RESULTS.**

1951 S. Parco Ave., Unit A
Ontario, CA 91761
orders@foralighting.com
1 (844) 865-5444

www.foralighting.com